



DJ61F-40P 低温截止阀 (32600DA) Cryogenic Globe Valve

主要性能规范 Main Technical Parameter


公称口径: DN10~40mm
 公称压力: PN4.0MPa
 适用介质: LO₂、LN₂、LAr、LNG等
 适用温度: -196℃~+80℃
 连接方式: 插焊

主要零件材料 Main material of parts

阀体: CF8
 阀顶: 不锈钢
 阀杆: 不锈钢
 密封圈: 增强聚四氟乙烯

Body: CF8
 Disc: Stainless steel
 Stem: Stainless steel
 Sealing Ring: Reinforcing PTFE

Nominal Diameter: DN10~40mm
 Nominal Pressure: PN4.0MPa
 Applicable Medium: LO₂、LN₂、LAr、LNG etc.
 Applicable Temperature: -196℃~+80℃
 Type of Connection: Socket Welding

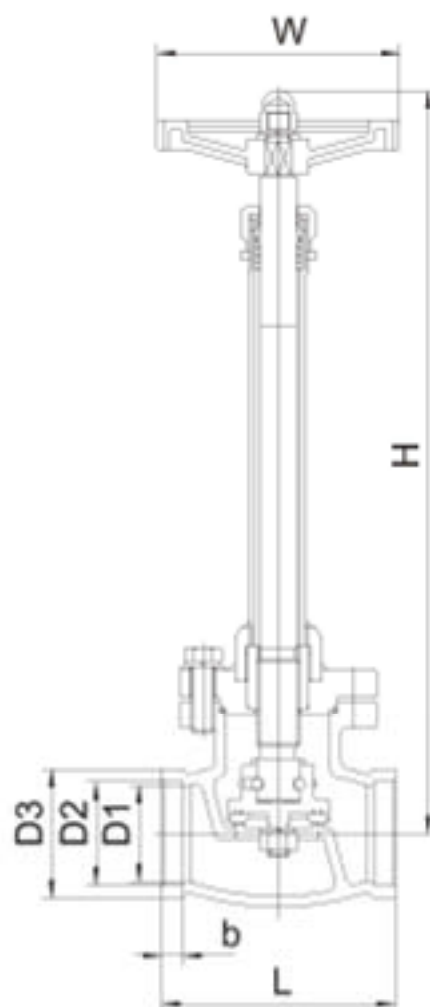

主要连接尺寸 Main Connection Size

产品代号 Products Code	尺寸 size(mm)									重量 Weight (kg)
	H	W	L	D0	D1	D2		D3	b	
						公制	英制			
32600DA10	275	75	60	10	12	14.5	18	24	5	1.9
32600DA15	275	75	60	15	15	18.5	22	29	5	1.9
32600DA20	304	100	80	21	20	25.5	28	35	6	2.5
32600DA25	304	100	80	21	25	32.5	34.5	44	6	2.5
32600DA32	334	120	98	36	32	38.5	43	52	7	3.5
32600DA40	334	120	98	36	40	45.5	49	58	7	3.5