
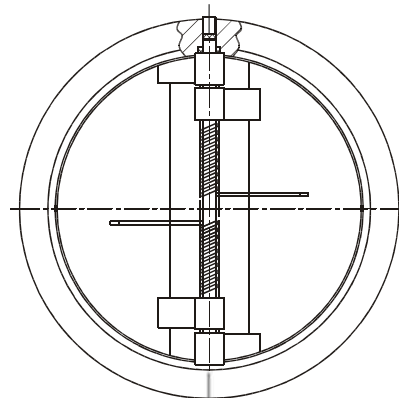


CHECK VALVE SERIES

hiwa
CONTROLS FLOW FREELY

CHECK VALVE SERIES

Fig. C10
C11
C12

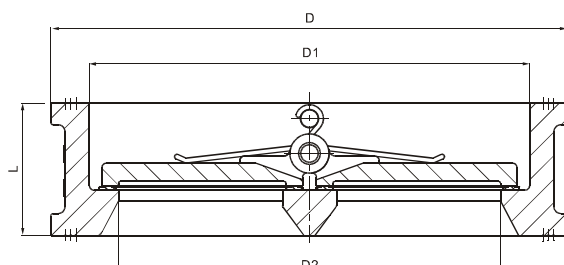

Standard Specification

Working Pressure	PN10,PN16,Class 125,10K
Face to Face	DIN3202 K3,API594
Flange Drilling	ISO 7005,BS EN1092, ASME Class 125/Class 150
Body	Cast Iron,WCB,SS304,SS316
Disc	Ductile Iron,SS304,SS316
Seat	EPDM,NBR,VITON

Dimensions(mm)

Size	mm	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350	DN400	DN450	DN500	DN600	DN700	DN800
	inch	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	32"
C10	L	43	43	46	64	64	70	76	89	114	114	127	140	152	152	178	229	241
	D	PN10	78	107	127	142	162	192	218	273	328	378	438	489	539	594	695	810
		PN16	78	107	127	142	162	192	218	273	328	378	444	489	555	618	733	804
	D1	57	65	80	94	117	145	170	224	265	310	360	410	450	505	624	720	825
	D2	38	46	60	70	88	115	134	184	220	260	298	350	385	438	538	640	734

Size	mm	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350	DN400	DN450	DN500	DN600
	inch	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
C11	L	54	54	57	64	70	76	95	108	143	184	190	203	213	222
	D	105	124	137	177	197	222	279	340	410	451	514	549	606	718
	D1	60	73	89	114	140	168	219	273	324	356	406	457	508	610
	D2	38	48	64	87	102	130	177	216	260	308	359	400	440	536

Size	mm	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350	DN400	DN450	DN500	DN600
	inch	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
C12	L	54	60	67	67	83	95	127	140	181	184	191	203	213	222
	D	107	127	137	175	187	222	279	340	410	451	511	546	603	714
	D1	65	78	94	117	145	171	222	276	328	375	410	450	505	624
	D2	46	60	70	88	115	134	182	220	260	298	350	385	438	538

Hiwa product specifications in this catalogue are for reference only. Hiwa reserves the rights to change the design, construction, specification and materials without prior notice.